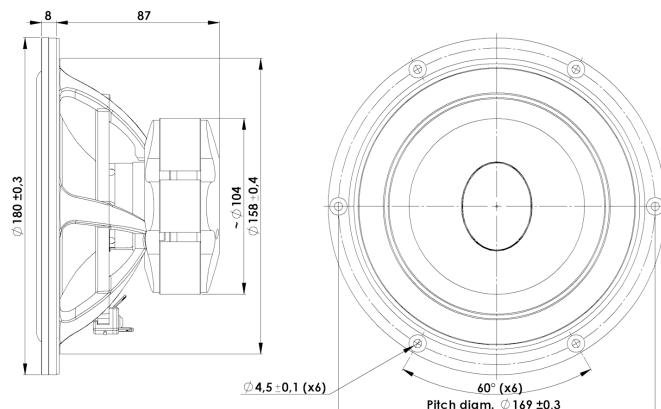


18 cm Midwoofer

Key Features:

- Elliptic voice coil
- AirCirc optimized magnet system
- Very low mechanical losses
- Exceptionally low distortion
- High sensitivity (SPL)
- Flexible appearance with replaceable decor ring

Recommendations (please see Tech Note):

- Operating frequency range: fs-6000 Hz
- Cabinet volume - closed box: N.a.
- Cabinet volume - vented box: N.a.

T-S Parameters:

| | |
|-------------------------------|---------------------|
| Resonance frequency [fs] | 50 Hz |
| Mechanical Q factor [Qms] | 5.01 |
| Electrical Q factor [Qes] | 0.34 |
| Total Q factor [Qt] | 0.32 |
| Force factor [Bl] | 9.7 Tm |
| Mechanical resistance [Rms] | 1 kg/s |
| Moving mass [Mms] | 16 g |
| Compliance [Cms] | 0.64 mm/N |
| Effective diaph. diameter [D] | 130 mm |
| Effective piston area [Sd] | 133 cm ² |
| Equivalent volume [Vas] | 16 l |
| Sensitivity (2,83V/1m) | 89 dB |

Mechanical Data:

| | |
|-----------------------------|----------|
| Voice coil diameter | 35/45 mm |
| Voice coil height | 20.4 mm |
| Voice coil layers | 2 |
| Gap height | 5 mm |
| Linear excursion | ± 7.7 mm |
| Max mech. excursion | ± 12 mm |
| Unit weight | 1.7 kg |
| Cabinet Displacement Volume | 0.32 l |

Electrical Data:

| | |
|----------------------------|---------|
| Nominal impedance [Zn] | 8 Ω |
| Minimum impedance [Zmin] | 7.6 Ω |
| Maximum impedance [Zo] | 100 Ω |
| DC resistance [Re] | 6.3 Ω |
| Voice coil inductance [Le] | 0.14 mH |

Power Handling:

| | |
|--------------------------------|-------|
| 100h RMS noise test (IEC 18.4) | 50 W |
| Long-term max power (IEC 18.2) | 100 W |
| X-over: None | |

